

# DHN-60R18/DG/FS

# 500~525W

## Full-Screen Double Glass PV Module

### Comprehensive Products & System Certificates

IEC 61215 / IEC 61730 / CE / INMETRO  
ISO 45001  
2018/International standards for occupational health & safety  
ISO 14001  
2015/Standards for environmental management system  
ISO 9001  
2015/Quality management system

 Material & technology warranty

 Linear power output warranty



Frameless design, installable both vertically & horizontally,  
No water, no dust, snow slide fast, power generation increased by 6-15%



Rectangular cells (182mm x 191.6mm) with higher power



TOPCon cells double-sided rate up to 85% and  
more back power generation by 5-25%




Double-glass Technology,  
higher encapsulation blocking and mechanical strength




TOPCon cells, lower attenuation,  
better temperature coefficient & dim light performance

# DHN-60R18/DG/FS 500~525W

## Design

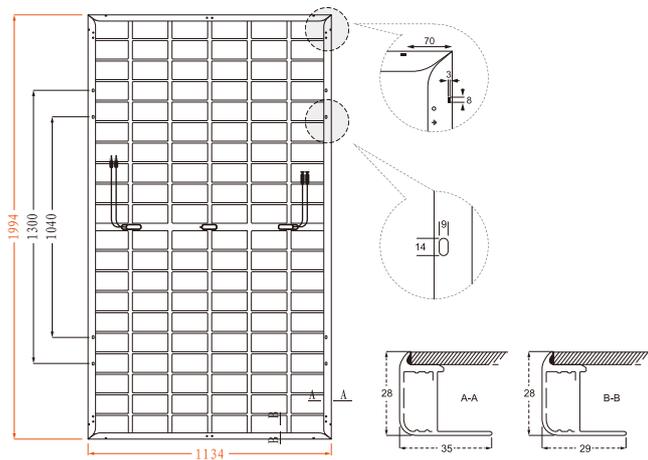

## 30-Year Linear Power Output Warranty

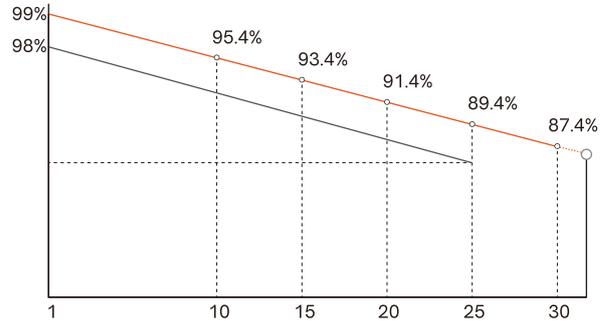

— DAH Solar linear power output guarantee  
— Standard linear power output guarantee

## Mechanical Specification

No. of Cells	120 (6×20)
Weight	27.2kg
Cells Type	N-type 182×95.8mm
Dimension (L×W×T)	1994×1134×28mm
Packing	38pcs/pallet, 836pcs/40HQ

Cable	4.0mm <sup>2</sup> , 300/200mm in length, (Including connector) length can be customized
Glass	2.0mm High Transmission, Antireflection Coating
Junction Box	IP68, 3 Bypass Diodes
Connector	MC4 Compatible

## Electrical Characteristics

Module Type	DHN-60R18/DG/FS											
	STC		NOCT		STC		NOCT		STC		NOCT	
Test conditions	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (P <sub>max</sub> /W)	500	376	505	380	510	384	515	387	520	391	525	395
Open-circuit Voltage (V <sub>oc</sub> /V)	43.7	41.5	43.9	41.7	44.1	41.9	44.3	42.1	44.5	42.3	44.7	42.5
Maximum Power Voltage (V <sub>mp</sub> /V)	37.1	35.2	37.3	35.4	37.5	35.6	37.7	35.8	37.9	36.0	38.1	36.2
Short-circuit Current (I <sub>sc</sub> /A)	14.48	11.69	14.54	11.74	14.60	11.79	14.66	11.84	14.72	11.88	14.78	11.93
Maximum Power Current (I <sub>mp</sub> /A)	13.48	10.67	13.54	10.72	13.60	10.77	13.66	10.81	13.72	10.86	13.78	10.91
Module Efficiency (STC)	22.11%		22.33%		22.55%		22.78%		23.00%		23.22%	
Refer Bifacial Factor	80±5%											

STC-Standard Test Environment: Irradiance 1000W/m<sup>2</sup>, Cell temperature 25°C, Spectrum AM1.5  
NOCT-Standard Test Environment: Irradiance 800W/m<sup>2</sup>, Ambient temperature 20°C, Spectrum AM1.5, Wind speed 1m/s

## Double-Sided Power Generation Parameters (Rear gain)

Gain	Parameter	5%	15%	25%
5%	Maximum Power (P <sub>max</sub> )	525	530	536
	Module Efficiency (%)	23.2	23.4	23.7
15%	Maximum Power (P <sub>max</sub> )	575.0	580.8	586.5
	Module Efficiency (%)	25.4	25.7	25.9
25%	Maximum Power (P <sub>max</sub> )	625.0	631.3	637.5
	Module Efficiency (%)	27.6	27.9	28.2

## Operating Parameters

Maximum System Voltage	1500V DC
Operating Temperature	-40 ~ +85°C
Maximum Series Fuse Rating	30A
Nominal Operating Cell Temperature	45°C±2°C
Application Level	Class A

## Temperature Coefficient

Temperature Coefficient of I <sub>sc</sub> (ΔI <sub>sc</sub> )	0.046%/°C
Temperature Coefficient of V <sub>oc</sub> (βV <sub>oc</sub> )	-0.25%/°C
Temperature Coefficient of P <sub>max</sub> (γP <sub>mp</sub> )	-0.29%/°C
Snow load, frontside / Wind load, backside	5400Pa/2400Pa